

Self-supporting metal panels insulated with PUR for use in industrial and commercial buildings, refrigerated rooms with positive temperature, and partitions in general.  
For additional technical information, refer to the MONOWALL® technical manual.

Major product technical approval:  
Zulassung Dibt Z - 10.4 - 241.  
Avis Technique CSTB AT/2/05-152

**IMPORTANT:** In the assembly stage, attention to the correct positioning of the painted side: the side marked with "INTERNAL" must face the inside.

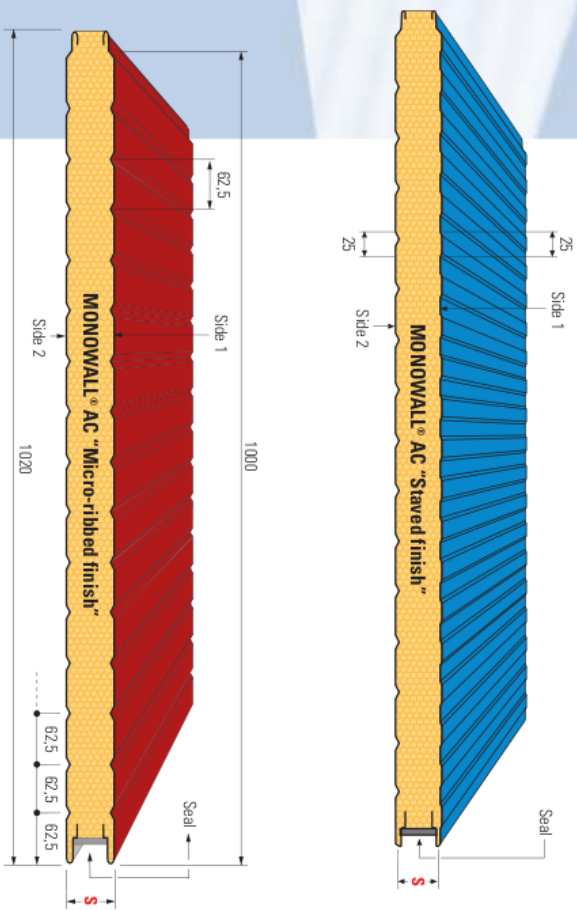


Table of safe spans

Values guaranteed with steel sheets as thick as indicated. Spans *l* in metres, as a function of a uniformly distributed load *P* (daN/m<sup>2</sup>), have been obtained from experimental data and calculated to provide a deflection limit:  $f \leq l/200$  of the span and a minimum safety coefficient that complies with the UEA's standards for insulated panels, which have been established and are implemented by primary European Certifying Organizations.

steel - steel (thickness 0.4 + 0.4)

S mm	K		Panel weight kg/m <sup>2</sup>	P = (daN/m <sup>2</sup> )										
	Kcal m <sup>2</sup> h °C	Watt m <sup>2</sup> °C		60	80	100	120	150	60	80	100	120	150	
25	0.66	0.77	7.20	2.05	1.90	1.75	1.65	1.55	1.75	1.60	1.50	1.40	1.30	
30	0.56	0.65	7.89	2.60	2.45	2.30	2.05	1.85	2.25	2.10	1.90	1.80	1.65	
35	0.48	0.56	8.08	3.20	3.00	2.80	2.50	2.20	2.80	2.60	2.40	2.20	2.00	
40	0.43	0.50	8.27	3.40	3.20	3.00	2.80	2.50	3.10	2.90	2.70	2.50	2.20	
50	0.35	0.41	8.65	3.90	3.65	3.40	3.10	2.75	3.45	3.20	2.95	2.75	2.40	
60	0.29	0.34	9.03	4.40	4.10	3.75	3.45	3.00	3.80	3.55	3.30	3.00	2.60	
80	0.22	0.26	9.79	5.20	4.65	4.25	3.95	3.35	4.50	4.00	3.70	3.35	2.90	
100	0.18	0.21	10.59	5.80	5.15	4.75	4.30	3.70	4.90	4.45	4.10	3.75	3.20	
120	0.15	0.18	11.35	6.40	5.70	5.25	4.75	4.05		5.50	4.90	4.50	4.10	3.50

aluminium - aluminium (thickness 0.6 + 0.6)

S mm	K		Panel weight kg/m <sup>2</sup>	P = (daN/m <sup>2</sup> )										
	Kcal m <sup>2</sup> h °C	Watt m <sup>2</sup> °C		60	80	100	120	150	60	80	100	120	150	
40	0.43	0.50	4.99	2.75	2.39	2.11	1.90	1.66	2.34	2.06	1.84	1.67	1.49	
50	0.35	0.41	5.37	3.26	2.84	2.52	2.27	1.99	2.76	2.44	2.19	1.99	1.77	
60	0.29	0.34	5.75	3.74	3.26	2.90	2.62	2.32	3.16	2.79	2.51	2.29	2.04	
80	0.22	0.26	6.51	4.34	3.78	3.36	3.04	2.69	3.79	3.35	3.01	2.75	2.45	
100	0.18	0.21	7.27	4.86	4.24	3.77	3.41	3.02	4.30	3.79	3.41	3.11	2.77	
120	0.15	0.18	8.03	5.31	4.63	4.12	3.72	3.29		4.74	4.19	3.77	3.44	3.06

